

GENERAL DESCRIPTION

The CFPPL-N converts switched and unswitched fluorescent lighting into code required emergency lighting. The CFPPL-N may be installed in or near the fixture to provide unobtrusive life safety protection.


ILLUMINATION

The CFPPL-N provides 90 minutes of emergency illumination by utilizing existing fluorescent lighting. The CFPPL-N is compatible with standard energy-saving or electronic ballasts, and provides an 625 lumen maximum output. See lamp operation for specific lamp types.

APPLICATION

The CFPPL-N is suitable for commercial locations where emergency lighting protection is required using existing fluorescent lighting.

DIMENSIONS

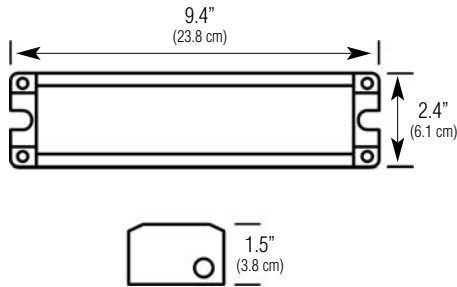

Dimensions are approximate and subject to change.

CFPPL-N

Fluorescent Emergency Ballast

625 Lumen Maximum Output



SHOWN: CFPPL-N

HOUSING

Housing constructed of 20 gauge steel with a high temperature powder coat paint finish.

Housing allows for housing frame mounting in most recessed luminaires.

ELECTRONICS

120/277 VAC dual voltage input capability.

Constant current charger restores battery to full charge within UL 924 specifications.

Compatible with most standard energy-saving magnetic or electronic lamp ballasts.

Charging system complete with AC indicator lamp, test switch, and mounting plate hardware.

BATTERY

Maintenance free, sealed nickel cadmium battery

Supplies 90 minutes of emergency power

Estimated service life of 10 years

Operating temperature range of 32°F (0°C) to 122°F (50°C)

LAMP OPERATION¹

Operates the following lamp types:²

Most 5-13 watt T4 compact fluorescent
(2 pin with integral starter)

NOTES:

- 1) Consult factory for compatibility, operation and performance of product with lamp types not listed.
- 2) See table 1 on back for specific lamp performance and operation.

OPERATING TEMPERATURE RANGE

Standard Damp Location: 32°F (0°C) to 122°F (50°C)

ELECTRICAL SPECIFICATIONS

Input power requirements

3.5 watts max.

CODE COMPLIANCE

UL 924 listed

UL Damp Location listing standard

NFPA 70 and NFPA 101, NEC, BOCA, OSHA and IBC illumination standards

WARRANTY

One year full electronics warranty

One year full, four year pro-rata battery warranty

ORDERING INFORMATION

CFPPL-N

**FLUORESCENT EMERGENCY
BALLAST**

CFPPL-N = 625 Lumen Max. Output
Fluorescent Emergency Ballast
for One Lamp Operation

Specification Data for CFPPL-N Fluorescent Emergency Ballast

HOUSING

Housing constructed of 20 gauge steel with a high temperature powder coat paint finish.

Housing allows for housing frame mounting in most recessed luminaires.

ELECTRONICS

Dual voltage 120/277 VAC input is standard.

An indicator light and test switch are available to signify that AC utility is present, and provide local means of transfer to emergency operation.

Battery charging circuitry is entirely solid-state and of a constant current design. Battery recharge time after a complete discharge is less than the required UL 924 standard.

Solid-state circuitry causes an instantaneous transfer to battery power if either the loss of AC utility, or a brownout condition is detected. When line voltage is present and stabilized, the transfer circuitry switches back to normal operation and begins recharging the battery.

BATTERY

Sealed, maintenance free nickel cadmium battery is equipped with a quick connect plug assembly for easy installation.

Standard sustained emergency operation is for 90 minutes with the illumination source providing full light output.

The listed operating temperature range is 32°F (0°C) to 122°F (50°C) and should provide a service life of 10 years.

ELECTRICAL SPECIFICATIONS

Input power requirements

3.5 watts max.

CODE COMPLIANCE

The CFPPL-N meets or exceeds all performance standards as required by UL 924, NFPA 70, NFPA 101, NEC, BOCA, OSHA and IBC. UL Damp Location listing standard.

Lamp Operation and Performance Table 1

LAMP TYPE	WATTAGE	BASE TYPE	NON-EMERGENCY MAX. LUMEN OUTPUT	EMERGENCY OP. MAX. LUMEN OUTPUT	EMERGENCY LAMP OPERATION
F5BXT4	5	G23/2 Pin	250	200	One Only
F7BXT4	7	G23/2 Pin	400	300	One Only
F9BXT4	9	G23/2 Pin	600	475	One Only
F13BXT4	13	GX23/2 Pin	825	625	One Only

NOTES:

- 1) Maximum non-emergency lumen output can vary based on lamp manufacturer, ambient operating temperature, and ballast manufacturer.
- 2) Maximum emergency lumen output is based on total output of one or two lamps, and can vary based on lamp manufacturer and ambient operating temperature.
- 3) Maximum emergency lumen output is supported for a full 90 minutes of operation.
- 4) Consult factory for compatibility, operation and performance of lamp types not listed.

SUGGESTED SPECIFICATION

Furnish and install Chloride Systems' fluorescent emergency ballast model _____. The unit shall be constructed to meet Underwriter's Laboratories, Inc. Standard #924 and the National Electrical Code (NEC).

INSTALLATION AND OPERATION - Unit shall be easily field connected to a 120 or 277 VAC, 60 hertz, unswitched power source. Installation must comply with the NEC as well as other applicable codes. Upon utility power failure or brownout, the unit shall automatically transfer to battery power and maintain the required illumination for a minimum period of 90 minutes. Upon restoration of utility power, the charger shall restore the battery to full charge within UL 924 requirements following a rated discharge of not more than 90 minutes.

CHARGER - Unit shall utilize a solid-state, constant current charging system which will maintain the battery at full capacity without the need for periodic exercising or equalization.

BATTERY - The battery shall be a high temperature, maintenance free, nickel cadmium battery. The unit shall be UL Damp Location listed with an operating temperature range of 32°F (0°C) to 122°F (50°C). Nickel cadmium batteries shall be supplied with a one year full warranty.

ENCLOSURE - The housing shall be constructed of 20 gauge steel with a high temperature powder coat paint finish. The slim housing shall allow for housing frame mounting in most recessed luminaires.



CHLORIDE
SYSTEMS

272 West Stag Park Service Road • Burgaw NC 28425
Telephone: (910) 259 1000 • Facsimile: (800) 258 8803
www.chloridesys.com

C1149R2
10/11 IH