


GENERAL DESCRIPTION

The C3400-3 Fluorescent Emergency Ballast converts switched and unswitched fluorescent lighting into code required emergency lighting. The C3400-3 may be installed in or near the fixture to provide unobtrusive life safety protection. The C3400-3 meets the Buy American requirements.

ILLUMINATION

The C3400-3 provides 90 minutes of emergency illumination by utilizing existing fluorescent lighting and produces 3,400 lumens initial emergency light output when used to power two or three 32w T8 fluorescent lamps, two or three 39w, or two 40 - 55w 4-pin long compact fluorescent lamps. Any non-emergency AC ballast used in conjunction with the C3400-3 MUST be an instant start, parallel output 2, 3, or 4 lamp regular or dimming type ballast. See lamp operation for specific lamp types.

DIMENSIONS

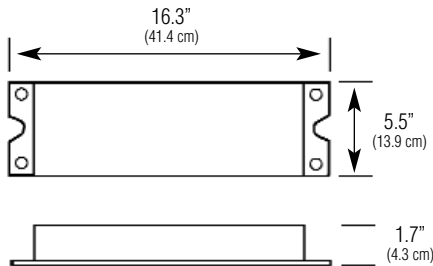

Dimensions are approximate and subject to change.

C3400-3

Fluorescent Emergency Ballast For Three Lamp Operation 3400 Lumen Maximum Output



HOUSING

Housing is constructed of 20 gauge steel with a high temperature powder coat paint finish.

Slim housing allows for housing frame mounting on most recessed luminaires.

ELECTRONICS

120/277 VAC dual voltage input with surge protection, solid-state charging circuitry provides for a reliable charging system.

Charging system is complete with AC indicator lamp and test switch.

BATTERY

Maintenance free, sealed nickel cadmium battery

Supplies 90 minutes of emergency power

Estimated service life of 10 years

Operating temperature range of 32°F (0°C) to 131°F (55°C)

LAMP OPERATION¹

Operates the following lamp types²:

T8 Linear Fluorescent

T5 Long Compact Fluorescent

NOTES:

- 1) Consult factory for compatibility and performance of product with lamp types not listed.
- 2) See Table 1 for specific lamp performance and operation



SHOWN: C3400-3

CODE COMPLIANCE

UL 924 listed

NFPA 70 and NFPA 101, NEC, BOCA, OSHA and IBC illumination standards

ELECTRICAL SPECIFICATIONS

Input power requirements

8.0 watts max.

WARRANTY

Five year full electronics warranty

Five year full battery warranty

ORDERING INFORMATION (EXAMPLE: C3400-3)

C3400-3

FLUORESCENT EMERGENCY BALLAST

C3400-3 = 3,400 Lumen Max. Output
Fluorescent Emergency Ballast
for Two or Three Lamp Operation

—

OPTIONS

EX = Special Input Transformer
(Specify voltage and frequency)

ACCESSORIES (order as a separate line item)

RTS = Remote Test Plate
RTS2 = Remote Test Switch & Pilot Light Kit
(includes plate)

Specification Data for C3400-3 Fluorescent Emergency Ballast

HOUSING

Housing is constructed of 20 gauge metal with a high temperature powder coat paint finish.

Housing is very compact, thus allowing for housing frame mounting on most recessed luminaires.

ELECTRONICS

Dual voltage 120/277 VAC input is standard.

An indicator light and test switch are available to signify that AC utility is present, and periodically transfer to emergency operation.

Battery charging circuitry is entirely solid-state, and of a constant voltage design. Battery recharge time after a complete discharge is less than the required UL 924 standard.

Solid-state circuitry causes an instantaneous transfer to battery power if either the loss of AC utility, or a brownout condition is detected. When line voltage is present and stabilized, the transfer circuitry switches back to normal operation and begins recharging the battery. The transfer circuitry can be tested via a momentary test switch installed on the luminaire, or in a remote location.

BATTERY

Sealed, maintenance free nickel cadmium battery is equipped with a quick connect plug assembly for easy installation.

Standard sustained emergency operation is for 90 minutes with the illumination source providing full light output.

The suggested operating temperature range for nickel cadmium batteries is of 32°F (0°C) to 131°F (55°C) and should provide a service life of 10 years.

ELECTRICAL SPECIFICATIONS

Input power requirements

8.0 watts max.

CODE COMPLIANCE

The C3400-3 meets or exceeds all performance standards as required by UL 924, NEC, NFPA 70, NFPA 101, NEC, BOCA, OSHA and IBC.

LAMP OPERATION AND PERFORMANCE

Table 1

**Compatible only with instant start, parallel output 2, 3, and 4-lamp electronic, standard, energy saving, and dimming AC ballast

LAMP TYPE	WATTAGE	BASE TYPE	NON-EMERGENCY MAX. LUMEN OUTPUT	EMERGENCY OP. MAX. LUMENS 3 PARALLEL LAMPS	EMERGENCY OP. MAX. LUMENS 2 PARALLEL LAMPS
F32T8	32	G13/Med Bi-Pin	2850	3400	3000
F39/36BX	39	2G11/4--Pin	2850	3200	2700
F40/30BX	40	2G11/4--Pin	3150	N/A	3200
F50BX	50	G24Q-3/4-Pin	4000	N/A	3200

NOTES:

- 1) Maximum non-emergency lumen output can vary based on lamp manufacturer, ambient operating temperature, and ballast manufacturer.
- 2) Maximum emergency lumen output is based on total output of one or two lamps, and can vary based on lamp manufacturer and ambient operating temperature.
- 3) Maximum emergency lumen output is supported for a full 90 minutes of operation.
- 4) Consult factory for compatibility, operation and performance of lamp types not listed.

SUGGESTED SPECIFICATION

Furnish and install Chloride's fluorescent emergency ballast model C3400-3. The unit shall be constructed to meet Underwriter's Laboratories, Inc. Standard #924 and the National Electrical Code (NEC).

INSTALLATION AND OPERATION - Unit shall be easily field connected to a 120 or 277 VAC, 60 hertz, unswitched power source. Installation must comply with the NEC as well as other applicable codes. Upon utility power failure or brownout, the unit shall automatically transfer to battery power and maintain the required illumination for a minimum period of 90 minutes. Upon restoration of utility power, the charger shall restore the battery to full charge within UL 924 requirements following a rated discharge of not more than 90 minutes.

CHARGER - Unit shall utilize a solid-state, constant current charging system which will maintain the battery at full capacity without the need for periodic exercising or equalization.

BATTERY - The battery shall be a maintenance free, nickel cadmium battery. The nickel cadmium battery shall utilize sintered plate construction and polypropylene separators for trouble-free operation in ambient temperatures up to 131°F (55°C). Nickel cadmium batteries shall be supplied with a five year full warranty.

ENCLOSURE - The housing shall be constructed of 20 gauge steel with a high temperature powder coat paint finish. The slim housing shall allow for housing frame mounting on most recessed luminaires.



CHLORIDE
SYSTEMS

272 West Stag Park Service Road • Burgaw NC 28425
Telephone: (910) 259 1000 • Facsimile: (800) 258 8803
www.chloridesys.com

C1210R14
2/11 IH