


## GENERAL DESCRIPTION

The CTP500T Fluorescent Emergency Ballast converts switched and unswitched fluorescent lighting into code required emergency lighting. The CTP500T may be installed in or near the fixture to provide unobtrusive life safety protection.

## ILLUMINATION

The CTP500T provides 90 minutes of one lamp emergency illumination by utilizing existing fluorescent lighting, and produces 500 lumens initial emergency light output. The CTP500T can be used with most 17w to 40w (2'-4') T8, T10, or T12 fluorescent lamps without integral starters, including U-shaped, HO, VHO, circline, and 4-pin long compact fluorescent lamps (30w to 42w). It is also compatible with most 1, 2, 3 and 4-lamp electronic, standard, energy saving and dimming AC ballasts. See lamp operation for specific lamp types.

## DIMENSIONS

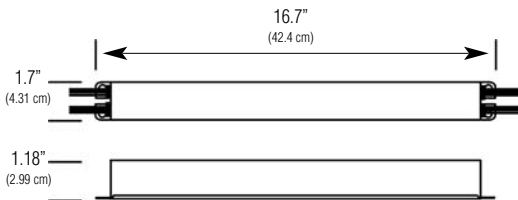

Dimensions are approximate and subject to change.

# CTP500T


## Low-Profile Fluorescent Emergency Ballast For One Lamp Emergency Operation 500 Lumen Maximum Output



### HOUSING

Housing is constructed of 22 gauge steel with a high temperature powder coat paint finish.

Low profile housing allows mounting in most low-profile fluorescent fixtures with low profile AC ballast.

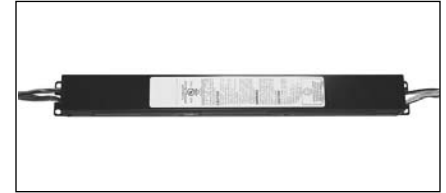

SHOWN: CTP500T

### ELECTRONICS

120/277 VAC dual voltage input with solid-state charging circuitry provides a reliable charging system.

Charging system is complete with an integral illuminated single-pole push to test switch.

### BATTERY

Maintenance free, high temperature sealed nickel cadmium battery

Supplies 90 minutes of emergency power

Estimated service life of 10 years

Operating temperature range of 32°F (0°C) to 122°F (50°C)

### LAMP OPERATION<sup>1</sup>

Operates the following lamp types in emergency mode:

T8/HO T8 (1") Linear Fluorescent

T12 (1-1/2") Linear Fluorescent

T5 Long (4-Pin) Compact Fluorescent

End of lamp life compatible

### NOTES:

1) Consult factory for compatibility and performance of product with lamp types not listed.

### CODE COMPLIANCE

UL 924 listed

UL listed for damp locations 32°F (0°C) to 122°F (50°C)

NFPA 70 and NFPA 101, NEC, BOCA, OSHA and IBC illumination standards

Suitable for use in sealed and gasketed luminaires

### ELECTRICAL SPECIFICATIONS

Input power requirements

2.5 watt max.

### WARRANTY

One year full electronics warranty

One year full battery warranty

## ORDERING INFORMATION

**CTP500T**

### LOW PROFILE FLUORESCENT EMERGENCY BALLAST

CTP500T = 500 Lumen Max. Output  
Fluorescent Emergency Ballast  
for One Lamp Operation

### ACCESSORIES (order as a separate line item)

WEC = Wire End Caps For Use When Product  
Is Mounted On Top Of Fixture

# Specification Data for CTP500T Fluorescent Emergency Ballast

---

## HOUSING

Housing is constructed of 22 gauge metal with a high temperature powder coat finish.

Housing is very slim and compact, allowing for mounting in most low-profile fluorescent fixtures with low profile AC ballast.

## ELECTRONICS

Dual voltage 120/277 VAC input is standard.

A one-piece indicator light and test switch are available to signify that AC utility is present, and provide local means of transfer to emergency operation.

Battery charging circuitry is entirely solid-state, and of a constant current design. Battery recharge time after a complete discharge is less than the required UL 924 standard.

Solid-state circuitry causes an instantaneous transfer to battery power if either the loss of AC utility, or a brownout condition is detected. When line voltage is present and stabilized, the transfer circuitry switches back to normal operation and begins recharging the battery.

## BATTERY

Sealed, maintenance free, high temperature nickel cadmium battery is equipped with a quick connect plug assembly for easy installation.

Standard sustained emergency operation is for 90 minutes with the illumination source providing full light output.

The suggested operating temperature range for nickel cadmium batteries is of 32°F (0°C) to 122°F (50°C) and should provide a service life of 10 years.

## ELECTRICAL SPECIFICATIONS

Input power requirements

2.5 watt max.

## CODE COMPLIANCE

The CTP500T meets or exceeds all performance standards as required by UL 924, NEC, NFPA 70, NFPA 101, NEC, BOCA, OSHA and IBC.

---

## SUGGESTED SPECIFICATION

Furnish and install Chloride Systems' low-profile fluorescent emergency ballast model CTP500T. The unit shall be constructed to meet Underwriter's Laboratories, Inc. Standard #924 and the National Electrical Code (NEC), and be approved for installation inside, on top of, or remote from the chosen luminaire.

**INSTALLATION AND OPERATION** - Unit shall be easily field connected to a 120 or 277 VAC, 60 hertz, unswitched power source. Installation must comply with the NEC as well as other applicable codes. Upon utility power failure or brownout, the unit shall automatically transfer to battery power and maintain the required illumination for a minimum period of 90 minutes. Upon restoration of utility power, the charger shall restore the battery to full charge within UL 924 requirements following a rated discharge of not more than 90 minutes.

**CHARGER** - Unit shall utilize a solid-state, constant current charging system which will maintain the battery at full capacity without the need for periodic exercising or equalization.

**BATTERY** - The battery shall be a maintenance free, high temperature nickel cadmium battery. The nickel cadmium battery shall provide trouble-free operation in ambient temperatures up to 122°F (50°C). Nickel cadmium batteries shall be supplied with a one year full warranty.

**ENCLOSURE** - The housing shall be constructed of 22 gauge steel with a high temperature powder coat paint finish. The slim housing shall allow for mounting in most low-profile fluorescent fixtures with low profile AC ballast.



**CHLORIDE**  
SYSTEMS

272 West Stag Park Service Road • Burgaw NC 28425  
Telephone: (910) 259 1000 • Facsimile: (800) 258 8803  
www.chloridesys.com

C1258  
7/10 IH